

# Paper Roll Clamps

## Models AMX-RH



Bolzoni Auramo Series AMX 360-degree rotating paper roll clamps have been designed for vertical and horizontal handling of 1-2 paper rolls.

Pivoting arm movement. Short and long arms. Non-split long arm for single roll handling. Split long arm for 1-2 roll handling. Thin arm design enables paper roll handling also in confined spaces.

Models AMX-RH: Hydraulically positionable short arm with wider roll diameter range. Hydraulic short arm positioning mechanism is activated at 45-degree clamp rotation angle. Optional fixed short arm versions available.


A well-proven and fast 360-degree rotator increases handling efficiency.

Simple and robust design makes the series AMX paper roll clamps easy to service.


Several contact pad and mounting options available on request. As standard the clamps are delivered with short high-friction cast contact pads.




### AMR-RH

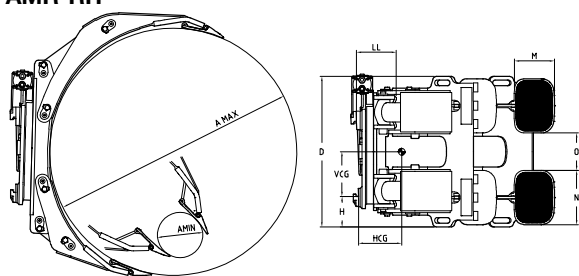

Unsplit long arm



Split long arm



**Range:** 1600 Kg - 3200 Kg

#### Plus:

- 360-degree rotating paper roll clamp for vertical and horizontal handling of 1-2 paper rolls.
- Pivoting arm movement. Short and long arms. Non-split long arm for single roll handling. Split long arm for 1-2 roll handling.
- Models AMX-RH: Hydraulically positionable short arm with wider roll diameter range. Hydraulic short arm positioning mechanism is activated at 45-degree clamp rotation angle. Optional fixed short arm versions available.
- A well-proven and fast 360-degree rotator increases handling efficiency.
- Simple and robust design makes the series AMX paper roll clamps easy to service.
- Several contact pad and mounting options available on request.
- Mounting angle 1,5 degrees.

Model	Capacity	Load Centre	Roll Range	Height	Weight	Horizontal Centre of Gravity	Vertical Centre of Gravity	Effective Thickness	Contact Pads	Contact Pad Gap	Mounting Height	Mounting Class
	Q kg	BP mm	A mm	D mm	W Kg	HCG mm	VCG mm	LL mm	M x N mm	O mm	H mm	ISO 2328
<b>Unsplit long arm</b>												
AMX-19RH-13-2A	1900	675	250-1350	830	595	315	300	178	220x800	200	165	2 A
AMX-19RH-13F-2A	1900	675	450-1350	830	530	290	265	178	220x800	200	165	2 A
AMX-19RH-13-3A	1900	675	250-1350	830	620	315	305	208	220x800	200	122	3 A
AMX-19RH-13F-3A	1900	675	450-1350	830	555	305	305	208	220x800	200	122	3 A
AMX-19RH-15-2A	1600	760	250-1520	830	625	330	265	178	220x800	200	165	2 A
AMX-19RH-15F-2A	1600	760	500-1520	830	620	330	265	178	220x800	200	165	2 A
AMX-19RH-15-3A	1600	760	250-1520	830	650	345	305	208	220x800	200	122	3 A
AMX-19RH-15F-3A	1600	760	500-1520	830	645	345	305	208	220x800	200	122	3 A
AMX-23RH-13-2A	2300	675	250-1350	830	600	300	265	178	220x800	200	165	2 A
AMX-23RH-13F-2A	2300	675	450-1350	830	535	290	265	178	220x800	200	165	2 A
AMX-23RH-13-3A	2300	675	250-1350	830	625	315	305	208	220x800	200	122	3 A
AMX-23RH-13F-3A	2300	675	450-1350	830	560	305	305	208	220x800	200	122	3 A
AMX-23RH-15-2A	2000	760	250-1520	830	630	330	265	178	220x800	200	165	2 A
AMX-23RH-15F-2A	2000	760	500-1520	830	625	330	265	178	220x800	200	165	2 A
AMX-23RH-15-3A	2000	760	250-1520	830	655	345	305	208	220x800	200	122	3 A
AMX-23RH-15F-3A	2000	760	500-1520	830	650	345	305	208	220x800	200	122	3 A
AMR-23RH-15-2A	2000	760	250-1520	830	630	330	265	178	220x300	200	165	2 A
AMR-23RH-15F-2A	2000	760	500-1520	830	625	330	265	178	220x300	200	165	2 A
AMR-23RH-15-3A	2000	760	250-1520	830	655	345	305	208	220x300	200	122	3 A
AMR-23RH-15F-3A	2000	760	500-1520	830	650	345	305	208	220x300	200	122	3 A
AMX-28RH-13-3A	2800	675	250-1350	1020	770	315	340	195	240x1000	-	192	3 A
AMX-28RH-13F-3A	2800	675	500-1350	1020	765	315	340	195	240x1000	-	192	3 A
AMX-28RH-15-3A	2400	760	250-1520	1020	795	335	340	195	240x1000	-	192	3 A
AMX-28RH-15F-3A	2400	760	550-1350	1020	790	340	340	195	240x1000	-	192	3 A
AMX-28RH-16-3A	2300	800	250-1600	1020	800	350	340	195	240x1000	-	192	3 A
AMX-28RH-16F-3A	2300	800	550-1350	1020	795	350	340	195	240x1000	-	192	3 A
AMX-32RH-13-3A	3200	675	250-1350	1020	780	315	340	195	240x1000	-	192	3 A
AMX-32RH-13F-3A	3200	675	500-1350	1020	770	315	340	195	240x1000	-	192	3 A
AMX-32RH-15-3A	3000	760	250-1520	1020	800	335	340	195	240x1000	-	192	3 A
AMX-32RH-15F-3A	3000	760	550-1520	1020	790	335	340	195	240x1000	-	192	3 A
AMX-32RH-16-3A	2800	800	250-1600	1020	810	345	340	195	240x1000	-	192	3 A
AMX-32RH-16F-3A	2800	800	550-1600	1020	800	350	340	195	240x1000	-	192	3 A

#### Notes:

- Two hydraulic functions.
- Models AMX-RH-F with fixed (non-moving short arm).
- Models AMX-RH with hydraulically positionable short arm.
- Standard contact pads: cast pad with high-friction surface.
- Minimum 5-degree forward tilt on lift mast is required for horizontal handling. For 0-degree tilt special arms are available. Consult Bolzoni Auramo.

#### Options:

- Special roll ranges.
- Contact pad options:
  - steel-sprayed
  - rubber faced
  - polyurethane faced
  - other contact pad friction surfaces
  - full length contact pads.



#### BOLZONI INDIA C/O MAIER+VIDORNO

RK PLAZA, SURVEY NO. 206/3, PLOT NO. 17, NEAR ROSARY SCHOOL,  
VIMAN NAGAR, PUNE 411014 INDIA (NORTHERN - CENTRAL INDIA) - TEL. +91 204 913 1000/22

[en.bolzoni group.com](http://en.bolzoni group.com) - [pares.h.kothawade@mv-india.com](mailto:pares.h.kothawade@mv-india.com)

