


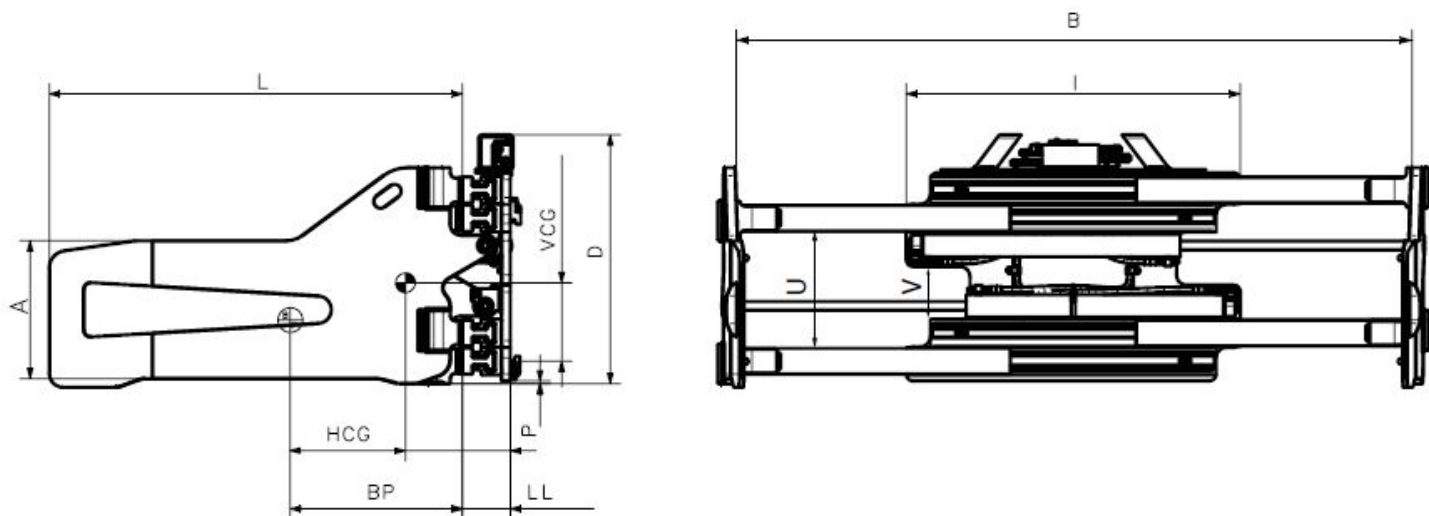

Model LC-G (with side shift)

model	Code	carrying capacity	load center	Arm range	Jaw size	frame width	Self-respect	horizontal center of gravity	vertical center of gravity	Missing distance	Jaw Retraction Distance	Installation level
		Q	BP	B	LxAxE-T	I	W	HCG	VCG	LL	C	ISO
		kg	mm	mm	mm	mm	kg	mm	mm	mm	mm	2328
LC 14 G4A	58-181	1400	500	580-1810	1000x400x30-46	930	390	265	232	117	25	II A
LC 14 G6A	58-181	1400	500	580-1810	1200x400x30-46	930	418	323	226	117	30	II A
LC 22 G4A	64-197	2200	500	640-1970	1000x400x30-46	970	478	251	233	139	25	II A
LC 22 G6A	64-197	2200	500	640-1970	1200x400x30-46	970	478	305	227	139	30	II A
LC 22 G6A	87-220	2200	500	870-2200	1200x400x30-46	970	480	305	227	139	30	II A
LC 22 G6A	47-176	2200	500	470-1760	1200x400x30-46	1100	487	298	228	139	30	II A
LC 22 G6A	53-186	2200	500	530-1860	1200x400x30-46	1080	492	297	229	139	30	II A
LC 28 G6B	64-237	2800	500	640-2370	1200x400x40-47	1420	634	295	256	132	12	III A
LC 28 G6B	64-197	2800	500	640-1970	1200x400x40-47	1020	560	327	251	132	12	III A
LC 28 G6B	47-176	2800	500	470-1760	1200x400x40-47	1150	577	318	252	132	12	III A
LC 28 G6B	56-250	2800	500	470-1760	1200x500x40-47	1710	713	309	267	132	12	III A
LC 32 G6B	45-190	3200	600	590-2130	1200x450x40-71	1280	830	289	293	169	twenty one	III A
LC 32 G4B	50-195	3200	600	640-2100	1200x450x40-71	1210	835	291	293	169	twenty one	III A
LC 32 G6B	50-195	3200	600	640-2370	1200x450x40-71	1420	887	278	295	169	twenty one	III A

LC 32 G6B	59- 213	3200	600	640- 2370	1500x450x40- 76	1420	1000	364	283	169	26	III A
LC 32 G6B	64- 210	3200	600	450- 1900	1200x450x40- 71	1330	837	289	293	169	twenty one	III A
LC 32 G6B	64- 237	3200	600	500- 1950	1000x450x40- 71	1280	796	290	293	169	twenty one	III A
LC 32 G8B	64- 237	3200	600	500- 1950	1200x450x40- 71	1280	830	292	293	169	twenty one	III A

options:

- Additional 2 hydraulic oil circuits.
- E= Jaw thickness, without ribs.
- T=Thickness of the root of the clamp arm, excluding ribs.
- The clamp arm is directly welded on the rail.
- one-way valve.
- Valve shifts sideways.

in addition:

- Change the hook now.
- Connect hose pack
- pressure gauge.
- Need to customize: special clamp arm.